

RESPONSIVE

We listen. We're responsive.

Gamma®

Heterogeneous Semi Contract

2018



Special Features



Applications

- Holiday accommodation
- Bedrooms
- Television rooms
- Staff accommodation
- Service areas
- Lobbies and waiting areas

Product Description

Gamma® 130 is a multi-layered vinyl floor covering, 1.30 mm thick with a 0.10 mm thick wear layer, available in sheets 2.00 m wide. The product comprises a compacted under layer reinforced with a glass fibre grid and a printed all-over design that is protected by a transparent wear layer.

Gamma® 130 is compact, heavy duty and durable. The flooring is anti-bacterial and anti-fungal, has a group T wear rating and is suitable for medium traffic areas.

Gamma®

Heterogeneous Semi Contract

Beauty of Nature

The wide variety of wood and stone designs makes this flooring a preferred choice for your residence. Specially designed to be easy to install and maintain, and yet is easy on the pocket.




332 - 61




335 - 61




216 - 4




335 - 52



417 - 61



335 - 32




410 - 4




332 - 60




335 - 49




347 - 52




347 - 60




417 - 60




347 - 35




347 - 58



410 - 60



410 - 35



417 - 91


Printed shades may appear slightly different from actual samples.

Gamma®


Heterogeneous Semi Contract




118 - 2

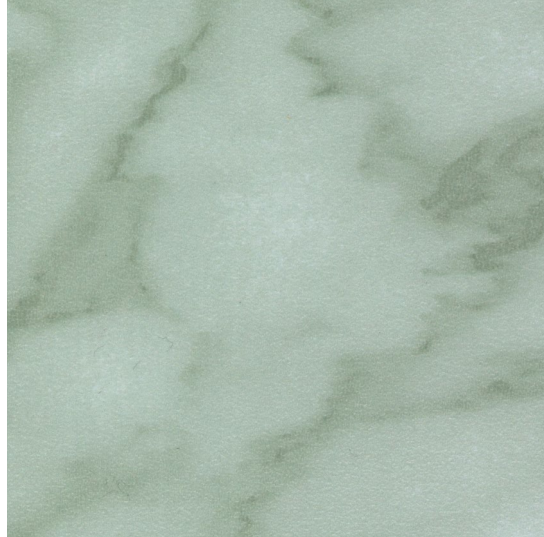

118 - 11

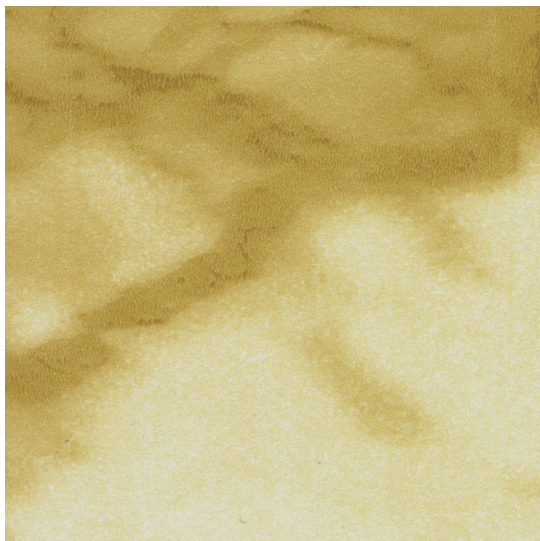

118 - 15

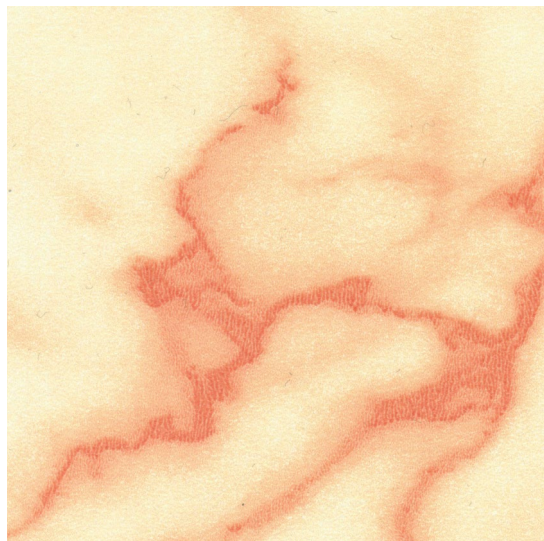

118 - 4

Gama®

Heterogeneous Semi Contract

Characteristics	Standards	Units	Gamma®
Indoor Air Quality	CA Section 01350 (≤ 0.5 mg / m ³)	Floorscore Certified (SCS - FS - 04547)	Yes
Description			
Type of floor covering	EN ISO 10582	Type 1 - Binder Content	Heterogeneous Semi Contract
General performance	EN ISO 10874 - EN 685	Classification	23 : Domestic Heavy 31 : Com. Moderate
Special Treatment			PU Treatment
Overall thickness	ISO 24346 - EN 428	mm	1.30
Thickness of wear layer	ISO 24340 - EN 429 ASTM F410	mm	0.15
Weight	ISO 23997 - EN 430	g/m ²	2280 ± 50
Sheet size	ISO 24341 - EN 426	m (Width)	2m
		l (length)	20m
		m ² (surface area)	40m ²
Abrasion resistance	EN 660 - 2	Group	T (Volume loss < 2mm ³)
Castor chair test	ISO 4918 - EN 425	Type of use	Continuous
Slip resistance	DIN 51130	Ramp test	R9
Dimensional stability	ISO 23999 - EN 434	%	≤ 0.40
Flexibility	ISO 24344 - EN 435	20mm mandrel	No cracking
Residual indentation	ISO 24343 - 1 - EN 433	mm	≤ 0.10
Colour fastness to light	EN ISO 105 B02	Degrees	≥ 6
Static electrical propensity	EN 1815	kV	< 2.0
Reaction to fire	EN ISO 13501 - 1	Class	Bfl - S1

