

**RESPONSIVE**



**IMPACT**

®

**A BETTER FLOOR**

**INSPIRE**®

**SPC FLOORING**



**UNILIN™ CLICK SYSTEM**



**INSPIRE**<sup>®</sup>  
SPC FLOORING: UNILIN™ CLICK SYSTEM



IMP-INS-03

Delicate Beech




IMP-INS-01

Grey Elm



IMP-INS-02

Country Oak

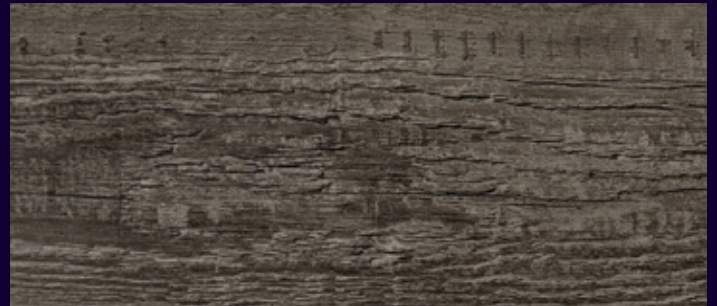

IMP-INS-04

Burnt Grey



IMP-INS-06

Honey Hazelnut



IMP-INS-07

Dark Jacobean



IMP-INS-05

Garden Walnut



IMP-INS-08

Rich Cherry



UNLIN™ Click System  
Easy & Quick Installation



Completely  
Waterproof



Superior Stain &  
Scratch Resistance

**INSPIRE**<sup>®</sup>  
SPC FLOORING: UNILIN™ CLICK SYSTEM



A BETTER FLOOR

**FEATURES & BENEFITS**



Superior Scratch & Stain Resistant



No Bugs & Termites



No Adhesive Required



Completely Waterproof



Easy Clean



Natural Looking Design



Zero Maintenance



Superb Dimensional Stability



Heavy Foot Traffic



Excellent Sound Insulation

**APPLICATIONS**



Corporate Offices



Residential



Retail



Hospitality



## INSPIRE<sup>®</sup>

### SPC FLOORING: UNILIN™ CLICK SYSTEM

#### SPC FLOORING FOR RESIDENTIAL & MEDIUM COMMERCIAL USE

PUR Polyurethane reinforcement | Product Standard: ISO 10582

CERTIFICATION & CLASSIFICATION	STANDARD	INSPIRE <sup>®</sup>
TYPE OF FLOOR COVERING	ISO 10582	SPC
CE CERTIFICATION	EN 14041	Yes
CLASSIFICATION	EN ISO 10874	Heavy Traffic : Class 31

TECHNICAL CHARACTERISTICS	STANDARDS	INSPIRE <sup>®</sup>
TOTAL THICKNESS	EN ISO 2436 (EN 428)	4.50 MM
WEAR LAYER THICKNESS	EN ISO 24340 (EN 429)	0.30 MM
SURFACE TREATMENT	UV TREATED	PUR
TOTAL WEIGHT	EN ISO 23997 (EN 430)	7.25 kg/m <sup>2</sup>
WEAR LAYER BINDER CONTENT	ISO 10582	TYPE I
FORM OF DELIVERY	EN ISO 24342 (EN 427) Planks box	7" X 48" = 25.66 sq.ft   11 Pieces per box 178 X 1219 mm = 2.39 m <sup>2</sup>   11 Pieces per box

TECHNICAL PERFORMANCES	STANDARDS	INSPIRE <sup>®</sup>
DIMENSIONAL STABILITY	EN ISO 23999 (EN 434)	≤ 0.10%
REACTION TO FIRE	EN 13501 – 1	Bfl- S1
RESIDUAL INDENTATION	EN ISO 24343-1 (EN 433)	Required value : ≤ 0.10mm Average measured value : 0.03mm
FURNITURE LEG	EN 424	No damage
CASTOR CHAIR	EN ISO 4918 (EN 425)	No damage
CURL RESULTANT TO HEAT	EN ISO 23999 (434)	≤ 2mm
IMPACT SOUND REDUCTION	EN ISO 140-8 EN ISO 717/2	w = 8dB
LIGHT FASTNESS	EN ISO 105 – B02	PASS
RESISTANCE TO CHEMICALS	EN ISO 26987 (EN423)	Good resistance
SLIP RESISTANCE	DIN51130 EN 13893	R9   PASS



ISO 9001  
ISO 14001  
ISO 18001



EN 14041



VOC Emission



Fire



Electrical



Slip



## INSPIRE<sup>®</sup>

### SPC FLOORING: UNILIN™ CLICK SYSTEM


#### UV SURFACE TREATMENT: Thickness In Microns

- Super Stain And Scratch Resistant
- Completely Waterproof
- No Bugs No Termites

#### TRANSPARENT WEAR LAYER: 0.30 mm

- Enhances The Colour And Emboss
- Protects From Abrasion

OVER ALL THICKNESS: 4.5 mm

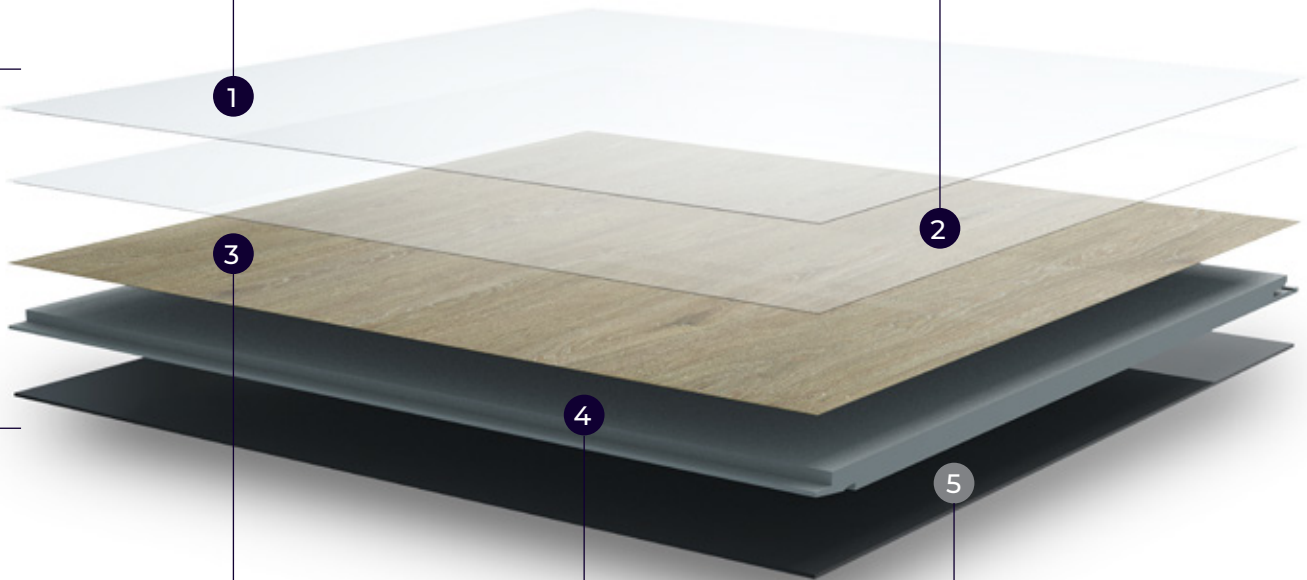

#### FILM LAYER: 0.10 mm

- Elegant Wood Designs
- Natural Looking, Natural Feeling

#### IXPE Backing: 1.00 mm

- 1mm IXPE Backing With Good Grip
- Insulates Sound
- Provides Underfoot Comfort

#### RIGID CORE: 3.10 mm

- Sturdy Construction
- Dimensional Stability
- Uniclic™ / Unipush™ Click System
- Quick And Easy Installation

## REACH US